




NTN Bearing Rolamentos do Brasil Ltda.

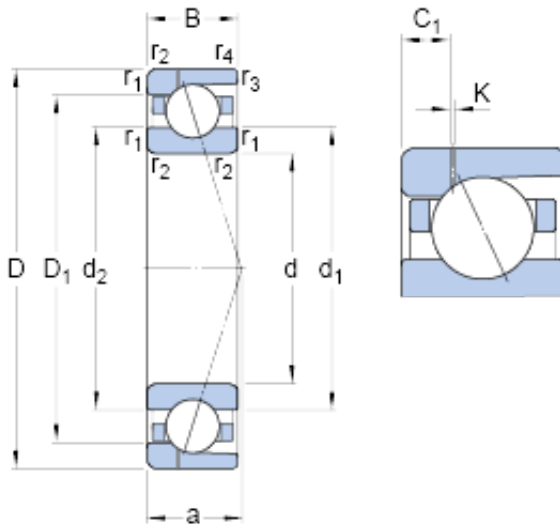

90 mm x 140 mm x 24 mm SKF 7018 ACD/HCP4AH1 Angular Contact Ball Bearings

Bearing No. 7018 ACD/HCP4AH1

7018 ACD/HCP4AH1 Bearing 2D drawings and 3D CAD models

Size	140x90x24 mm
Bore Diameter	140 mm
Outer Diameter	90 mm
Width	24 mm
d	90 mm
D	140 mm
B	24 mm
d ₁	105.4 mm
d ₂	105.4 mm
D ₁	124.6 mm
K	0.5 mm
C ₁	6.85 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1 mm
a	39 mm
d _a - min.	97 mm
d _b - min.	97 mm
D _a - max.	133 mm
D _b - max.	136 mm
r _a - max.	1.5 mm
r _b - max.	1 mm
d _n	108.7 mm
Basic dynamic load rating - C	74.1 kN
Basic static load rating - C ₀	72 kN



NTN Bearing Rolamentos do Brasil Ltda.

Fatigue load limit - P_u	2.8 kN
Limiting speed for grease lubrication	10000 r/min
Limiting speed for oil lubrication	16000 mm/min
Ball - D_w	15.875 mm
Ball - z	20
G_{ref}	15 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	460 N
Preload class B - G_B	920 N
Preload class C - G_C	1840 N
Preload class D - G_D	3680 N
Calculation factor - f	1.14
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2D}	1.08
Calculation factor - f_{HC}	1.02
Preload class A	272 N/micron
Preload class B	356 N/micron
Preload class C	472 N/micron



NTN Bearing Rolamentos do Brasil Ltda.

Preload class D	638 N/micron
d_1	105.4 mm
d_2	105.4 mm
D_1	124.6 mm
C_1	6.85 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1 mm
d_a min.	97 mm
d_b min.	97 mm
D_a max.	133 mm
D_b max.	136 mm
r_a max.	1.5 mm
r_b max.	1 mm
d_n	108.7 mm
Basic dynamic load rating C	74.1 kN
Basic static load rating C_0	72 kN
Fatigue load limit P_u	2.85 kN
Attainable speed for grease lubrication	10000 r/min
Attainable speed for oil-air lubrication	16000 r/min
Ball diameter D_w	15.875 mm
Number of balls z	20
Reference grease quantity G_{ref}	15 cm ³
Preload class A G_A	460 N
Static axial stiffness, preload class A	272 N/ μ m
Preload class B G_B	920 N
Static axial stiffness, preload class B	356 N/ μ m
Preload class C G_C	1840 N
Static axial stiffness, preload class C	472 N/ μ m



NTN Bearing Rolamentos do Brasil Ltda.

Preload class D G_D	3680 N
Static axial stiffness, preload class D	638 N/ μ m
Calculation factor f	1.14
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.08
Calculation factor f_{HC}	1.02
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	1.01 kg